

CLIC BAS

IP 20
Aluminum, polycarbonate,
acrylic satin
Internal electronic ballast

OPTIONAL
Dimming
Louver
Alu reflector
Emergency ballast

COLORS
Grey (N)
White (W)

POWER FEED
Hard wired


LIGHTSOURCE
T5 tube

MOUNTING
Wall and ceiling

Connector
050717 Gray
050727 White

Endcap
050716 Gray
050726 White




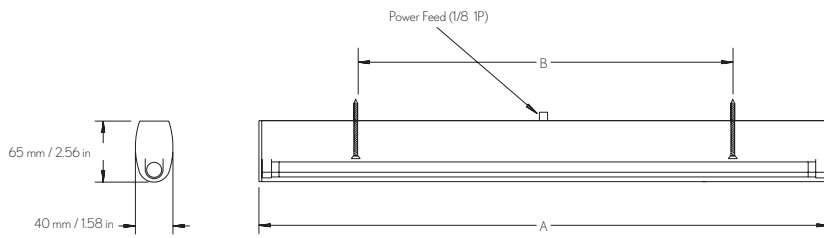


Art	Type	A	B
MCO3114	14 W/830	605 mm / 23.82 in	400 mm / 15.75 in
MC03121	21 W/830	905 mm / 35.63 in	700 mm / 27.56 in
MCO3128	28 W/830	1205 mm / 47.44 in	1000 mm / 39.37 in
MC3135	35 W/830	1505 mm / 59.25 in	1300 mm / 51.18 in
MCO3228	2x28 W/830	2405 mm / 94.69 in	2200 mm / 86.61 in
MCO3235	2x35W/830	3005 mm / 118.31 in	2800 mm / 110.24 in

Other length on request. Length includes endcaps.

LIGHT OUTPUT



ACRYLIC COVER



LOUVER

ACCESSORIES



059015

Optional / Tillval

050717 / 050727

050716 / 050726

030071 598 mm
030072 898 mm
030073 1198 mm
030074 1498 mm